


RoHS



HF





REV.	ECR/N NO.	DESCRIPTION	DRAWN	DATE
A	/	NEW	YAOSHIXUAN	2020/05/14
B	/	因客户改善EMI测试而调整相关电路,更新图纸	DENGJU	2020/11/03

Emitting	λ_p	$V_f@I_f=20mA$	$I_r@V_r=5V$
GREEN	570	1.8~2.4V	10mA
YELLOW	588	1.8~2.4V	10mA

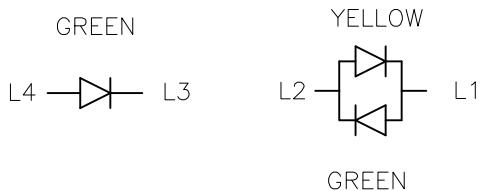


NOTES:

- MATERIALS:
 HOUSING: PBT, UL94V-0, BLACK
 CONTACTS: PHOSPHOR BRONZE T=0.30
 GOLD FLASH ON COANTCT AREA
 80u" TIN ON SOLDERTAIL
 SHELL: COPPER ALLOY T=0.20
 NICKEL PLATING OVERALL
- OPERATING TEMPERATURE: -40°C ~ +85°C
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F

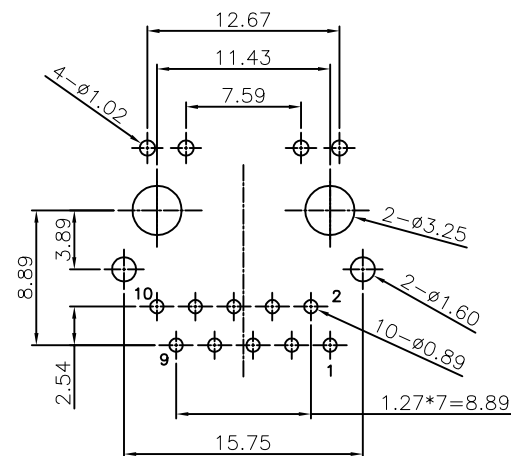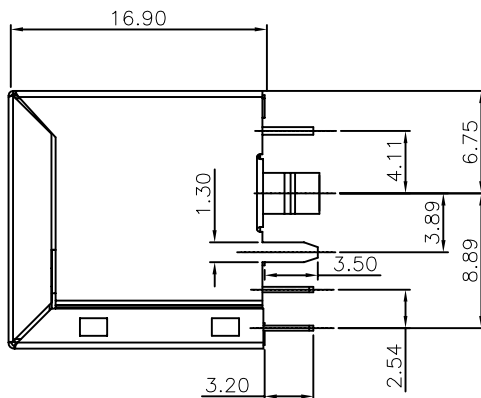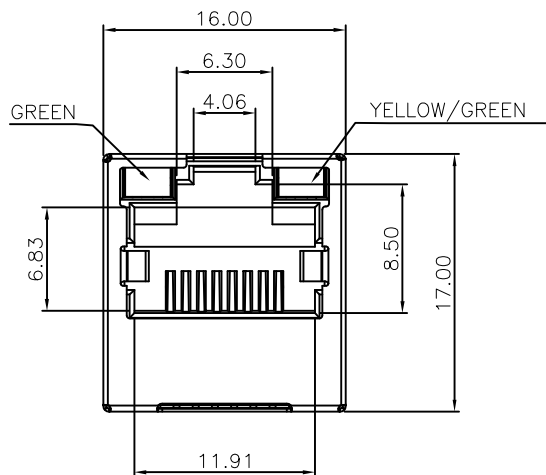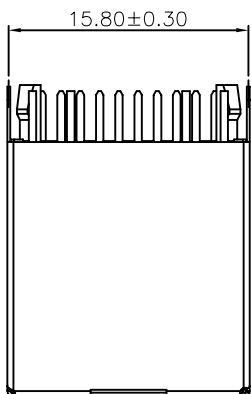

RECOMMENED PCB LAYOUT
 COMPONENT SIDE
 TOLERANCE ±0.05

TOLERANCE	MODEL NAME: RJ45 180度DIP H16.9 铜壳带灯左绿右黄绿 PBT黑胶环保 防火 带1000M滤波 针长3.2 吸塑包装	DRAWN: DENGJU
X.X ±0.20	MODEL NO: WLRJ-366B	CHECKED: YAOSHIXUAN
X.XX ±0.10	UNIT: mm	APPROVED: WUHUAMING
X.XXX ±0.05	SCALE: 1:1	DATE: 2020/11/03
ANGLE ±2.0°	REVISION: A	DWG NO:
	SHEET: 1/2	FILE: C



WLCO 深圳市兴万联电子有限公司
 SHENZHEN XING WAN LIAN ELECTRONICS CO., LTD.